


# A

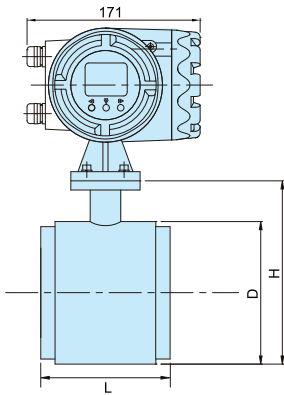


### Performance Feature

Diameter: DN25mm-DN150
Electrode: 316L, Hc, Ti, Ta, Pt
Liner: PTFE, PFA
Medium: conductivity liquids
Medium conductivity : $\geq 5\mu$ s/cm
Accuracy: $\pm 0.25\%RS, \pm 0.5\%RS, \pm 1.0\%RS$
Velocity of flow: 0.1m/s-10m/s
Working temperature: $-25^{\circ}C \sim 150^{\circ}C$
Working pressure: 1.0MPa
Output: 4-20mA/ frequency/pulse output signal
Power supply: 85~265VAC (50HZ or 60HZ) /24VDC
Installation type: compact, remote

### Sizes

DN(mm)	L	D	H
25	90	72	112
32	90	82	122
40	90	92	132
50	125	108	148
65	125	128	168
80	130	142	182
100	160	162	202
125	170	192	232
150	185	219	259

### KF700-JA How to order

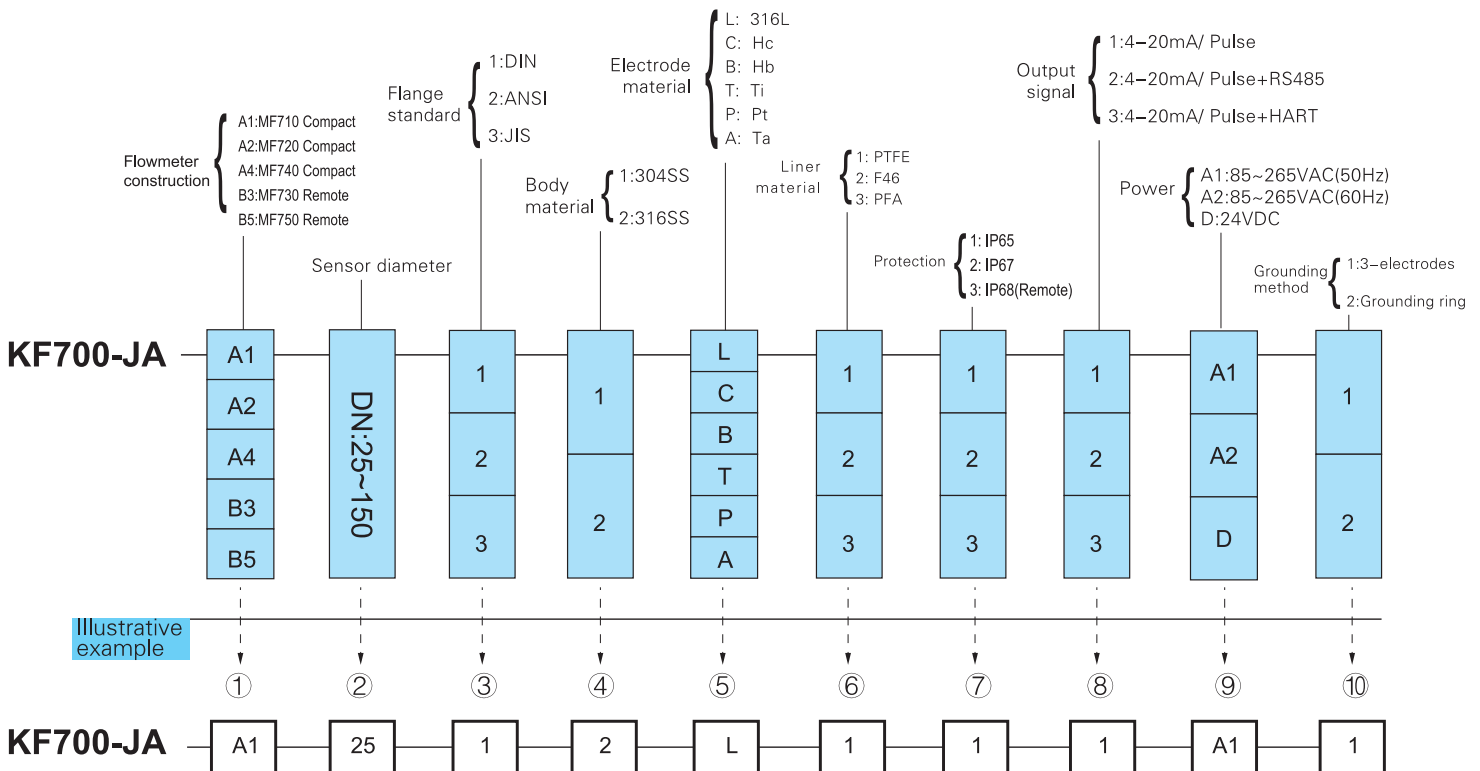

\* Remark: For remote type, please specify the cable length( Standard is 8M).