


Performance Feature

Diameter: DN25mm-DN100
 Electrode: 316L, Hc, Ti, Ta, Pt
 Liner: PTFE, PFA
 Medium: conductivity liquids
 Medium conductivity : $\geq 5 \mu \text{ S/cm}$
 Accuracy: $\pm 0.5\% \text{RS} - \pm 1.0\% \text{RS}$
 Velocity of flow: 0.1m/s- 10m/s
 Working temperature: $-25^{\circ}\text{C} \sim 150^{\circ}\text{C}$
 Working pressure: 0.6MPa-1.6MPa (base on diameter)
 Power supply: 85~265VAC (50HZ or 60HZ) / 24VDC, battery
 Installation type: compact, remote
 Connection standard: DIN

Sizes

D N(mm)	L	D	H
25	180	91	230
32	190	105	145
40	200	120	165
50	220	140	180
65	230	150	190
80	250	160	200
100	270	190	230

KF700-KA How to order

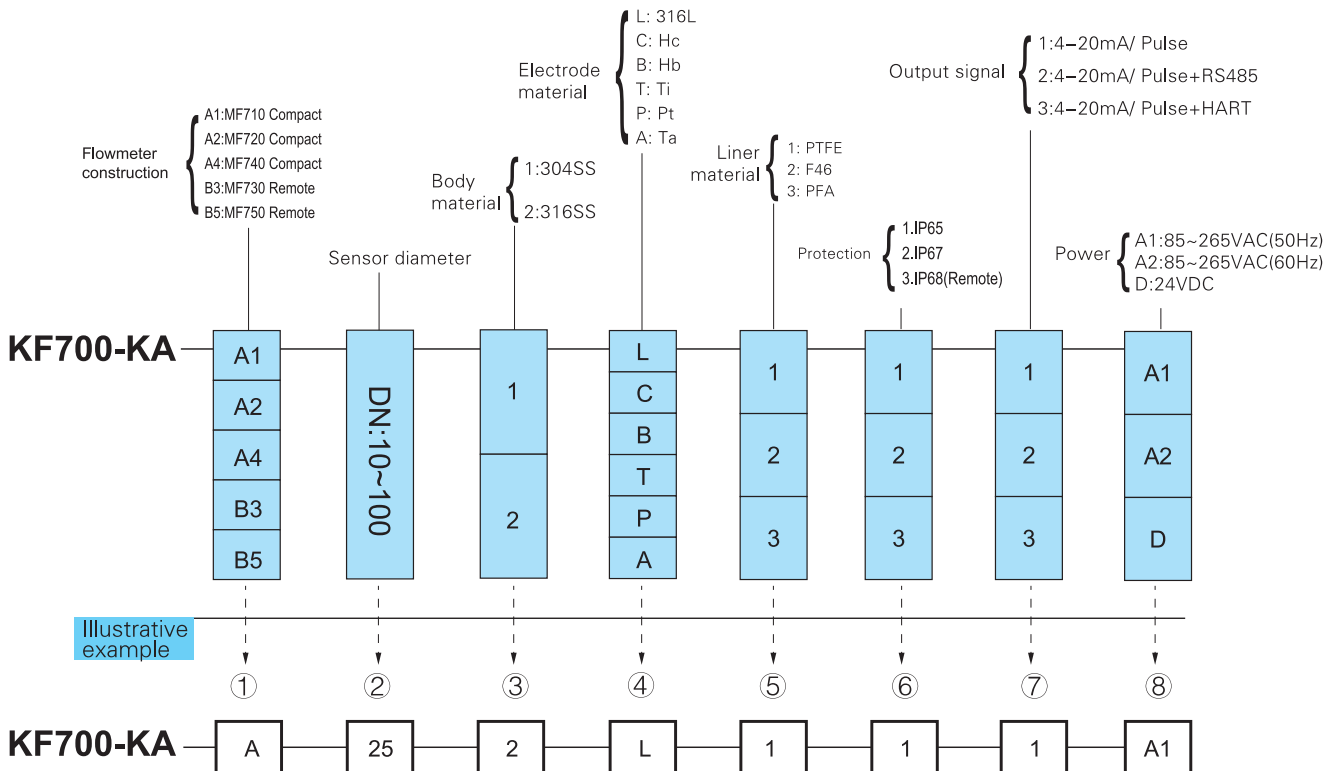

* Note: MF720, M730 is optional of RS485 or HART protocol

MF730, MF750 protection class is optional of IP68, normal standard is IP65 or IP67

* Remark: For remote type, please specify the cable length(Standard is 8M).