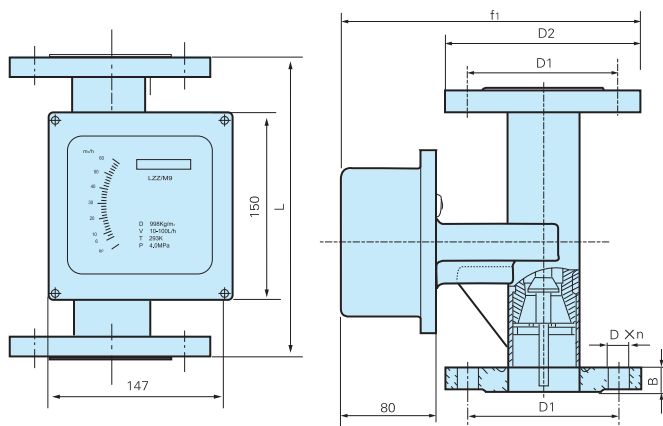


How To Select:

LZ	Metallic tube variable-area flowmeter	
ZH	Flow rate field display	
DH	Flow rate field display with 4–20mA output.	
DX	Totalizer with flow rate LCD display, 4–20mA output.	
DN15–150	Pipe size(mm)	
RR1	304, 1Cr18Ni9Ti	
RR2	316L, 00Cr17Ni14Mo2	
RR0	316, 0Cr18Ni12Mo2Ti	
Ti	Titanium alloy	
F	304 SS with PTFE liner	
M6 indicator : for DN15~DN50		M7 indicator: aluminium alloy
M8 indicator: Explosion proof		M9 indicator: All stainless steel
D1	24V power supply	
D2	Battery power supply	
Ks	Hi alarm	
Kx	Low alarm	
RL	Horizontal, from right to left	
LR	Horizontal, from left to right	
T	Keep warm	

LZ/ ☐ — ☐ — ☐ — ☐ — ☐ — ☐ — ☐ — ☐ — ☐ — ☐

Size


DN	L	B	D1	D2	f1
15	250	14	65	95	208
25	250	18	85	115	218
40	250	20	110	150	233
50	250	22	125	165	240
80	250	24	160	200	258
100	250	26	180	220	268
150	300	28	240	285	300