


LZS series main parts: tube SAN, float ABS, glue fittings
PVC, male thread PA6, female thread PA66

- Working pressure limited: $\leq 0.6\text{MPa}$
- Working temperature limited : $0-60^{\circ}\text{C}$
- Accuracy: $\pm 5\%$

Specifications

DN (mm)	Model	Measure range m^3/h	Glue	Male	Female	Elbow
15	LZS-15	10~100 L/h 16~160 L/h 25~250 L/h 40~400 L/h 60~600 L/h 100~1000 L/h	$\varnothing 20$	1/2"NPT 3/4"NPT	BSP 1/2"	BSP 1/2" NPT 1/2"
25	LZS-25	0.1~1 0.16~1.6 0.25~2.5	$\varnothing 32$	3/4"NPT	BSP 3/4" NPT 3/4"	BSP 3/4" NPT 3/4"
32	LZS-32	0.4~4 0.6~6	$\varnothing 40$	1"NPT	BSP 1" NPT 1"	BSP 1" NPT 1"
50	LZS-50	0.4~4 0.6~6 1~10 1.6~16	$\varnothing 63$	2"NPT	BSP 2" NPT 2"	BSP 2" NPT 2"
65	LZS-65	5~25 8~40 12~60	$\varnothing 75$	/	NPT 2 1/2"	/
100	LZS-100 flange	12~60 18~90 20~120	$\varnothing 110$	Hole distance 1180mm 8- $\varnothing 18$		
125	LZS-125 flange	25~150 30~180	$\varnothing 110$	Hole distance 1210mm 8- $\varnothing 18$		
150	LZS-150 flange	12~60 18~90 20~120 25~150 30~180	$\varnothing 110$	Hole distance 1240mm 8- $\varnothing 22$		

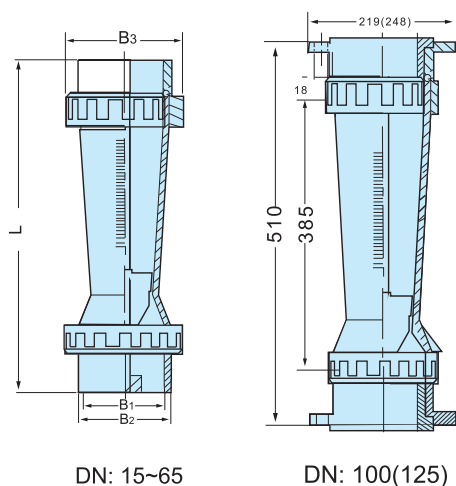

DN: 15~65

DN: 100(125)

Sizes

DN(mm)	(mm)			
	L	B1	B2	B3
15	220	20	26	51
25	230	32	39	60
32	290	40	49	72
50	350	63	73	98
65	420	75	88	122
100	547	Hole distance 180mm		8- $\varnothing 18$
125	547	Hole distance 1210mm		8- $\varnothing 18$
150	547	Hole distance 1240mm		8- $\varnothing 22$