


Z-500F(Female) Series

Plastic Flowmeters

Features

- Z-500F series of free standing, female ends
- Low cost of double scale flowmeter
- Union type in line fittings provide ease of installation and maintenance.
- O-rings side engage for positive seals.
- Direct reading scale(GPM-LPM water)is standard.special scales are available.
- Easy to read scale is positioned directly in front of metering tube.
- High/low flow alarm switch(reed type) is rated at 24VDC.
- Working pressure limit: 0.6Mpa
- Working temperature limit: 60°C
- Accuracy: ±5%

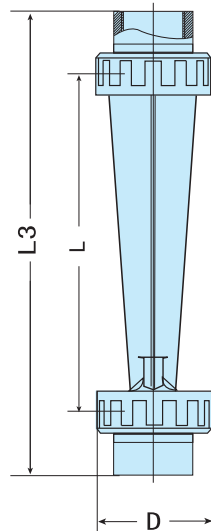

Specifications

Model	Water		Thread (F)
	(GPM)	(LPM)	
Z-5025	0.8-8 1-10	3-30 4-40	3/4"NPT 3/4"BSP
Z-5032	1.2~12 2-20 2.5-25	5-50 8-80 10-100	1"NPT 1"BSP
Z-5050	2.5-25 5-45 7-70	10-100 20-180 25-250	2"NPT 2"BSP
Z-5065	25-110 40-160 50-250	80-400 150-650 200-1000	2½"NPT

Note: Other flow range is optional as special order.

Sizes

Unit: mm

Model	L	D	Thread(F)	Weights (KG)
			L3	
Z-5025	170	59	228	0.4
Z-5032	223	72	287	0.65
Z-5050	290	100	370	2.5
Z-5065	325	120	423	3.5

Z-500F

How to order

