


G

### Features

- Z-500M series of free standing, female ends
- Low cost of double scale flowmeter
- Union type in line fittings provide ease of installation and maintenance.
- O-rings side engage for positive seals.
- Direct reading scale(GPM-LPM water)is standard.  
special scales are available.
- Easy to read scale is positioned directly in front of metering tube.
- High/low flow alarm switch(reed type) is rated at 24VDC.
- Working pressure limit: 0.6Mpa
- Working temperature limit: 60°C
- Accuracy: ±5%

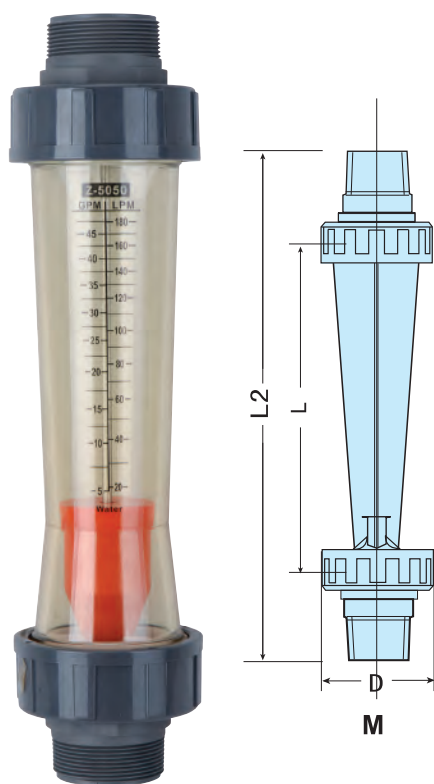

### Specifications

Model	Water		Thread (M)
	(GPM)	(LPM)	
Z-5008	0.1~1 0.2~2 0.5~5	0.5~4 1~7 1.8~18	1/2" BSP 1/2" NPT
Z-5008C	0.1~1 0.2~2 0.5~5	0.5~4 1~7 1.8~18	1/2" NPT 3/4" NPT
Z-5015	0.25~2.5 0.5-5 0.8-8	1~10 1.8~18 3~30	1/2" NPT 3/4" NPT
Z-5025	0.8-8 1-10	3-30 4-40	3/4" NPT
Z-5032	1.2~12 2-20 2.5-25	5-50 8-80 10-100	1" NPT
Z-5050	2.5-25 5-45 7-70	10-100 20-180 25-250	2" NPT

Note: Other flow range is optional as special order.  
Z-5008/Z-5008C/Z-5015 without alarm switch

### Sizes

Unit: mm

Model	L	D	Thread(M)	Weights (KG)
			L2	
Z-5008	99	42	170	0.15
Z-5008C	160	51	230	0.2
Z-5015	135	51	210	0.2
Z-5025	170	59	253	0.4
Z-5032	223	72	317	0.65
Z-5050	290	100	400	2.5

### Z-500M

### How to order

