

Z-500V_(Valve) Series

Plastic Flowmeters

The series of Z-500V flowmeter is made of PC/AS, the float material is ABS/316SS, the connector material is PVC. The adjuster of flowmeter can adjust the flow volume; there are characteristics such as good transparency, easy to read installation.


- Temperature Limit: PC (polycarbonate) 0~60 °C
- Z-5015CT alarm switch is optional

Specifications


Model	Water		Male Thread	Accuracy	Weights (KG)
	GPM	LPM			
Z-5008T	0.1~1 0.2~2 0.5~5 -- --	0.5~4 1~7 1.8~18 1~11 2~20	1/2"NPT	± 6%	0.2
Z-5008CT	0.1~1 0.2~2 0.5~5 --	0.5~4 1~7 1.8~18 2~15	1/2"NPT		
Z-5015T	0.25~2.5 0.5~5 0.8~8	1~10 1.8~18 3~30	1/2"NPT		
Z-5015CT	10~100, 16~160 L/h 25~250, 40~400 L/h		1/2"NPT		

Sizes

Model	A	B	C	D	Thread	Fitting material	Float material
Z-5008T	185	152	42	98	1/2"NPT	PVC	316SS
Z-5008CT	260	232	51	98	1/2"NPT	PVC	316SS
Z-5015T	235	205	51	98	1/2"NPT	PVC	316SS
Z-5015CT	270	240	51	98	1/2"NPT	PVC	ABS

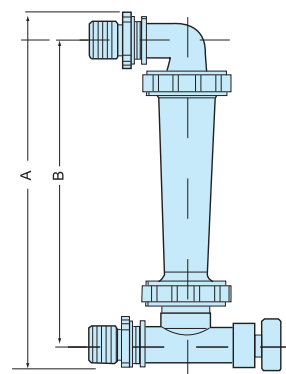

Unit: mm



Z-5010 Series pipeline flowmeter

Specifications

Model	Water (LPM)	Glue	Thread type
Z-5011	0.2~3	ø15 L:182mm	ZG 1/2" (Female) L:183mm
Z-5012	0.4~4		
Z-5013	0.6~6		
Z-5014	1~10		
Z-5015	1.6~16	ø15 L:211mm	ZG 3/4" (Male) L:211mm
Z-5016	2.5~25		
Z-5017	5.0~50		

